


# Wireless Telephone Quick Reference Guide

## Executone IDS

### Model 32 Station Set

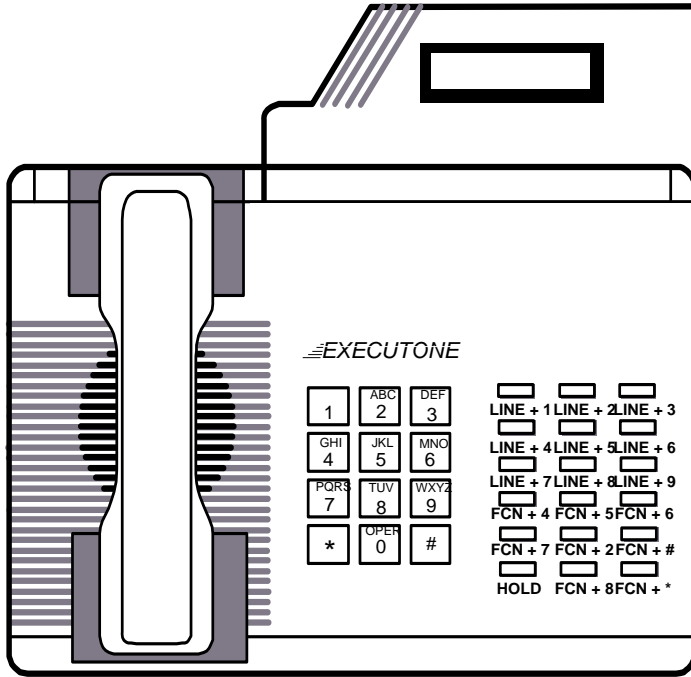


**Model 32 Station Set**

The diagram above shows how the Model 32 keypad corresponds to the Wireless Telephone.

Pressing **LINE** followed by a digit (**1-6**) on the Wireless Telephone is equivalent to pressing one of the first 6 line keys on the Model 32 station set

The next 6 Quick Dial keys on the Model 32 are programmable and can be accessed by **LINE 7, 8 and 9** and **FCN 4, 5 and 6** respectively on your Wireless Telephone.

Function Key Strokes	Default Settings	Fill In Your Feature Settings
FCN + 1	MUTE	
FCN + 2	TR/CON	
FCN + 3		
FCN + 4	(Quick Dial)	
FCN + 5	(Quick Dial)	
FCN + 6	(Quick Dial)	
FCN + 7	PROG	
FCN + 8	VM/MSG	
FCN + 9	EXIT MENUS	
FCN + #		
FCN + *		
LINE + 7	(Quick Dial)	
LINE + 8	(Quick Dial)	
LINE + 9	(Quick Dial)	

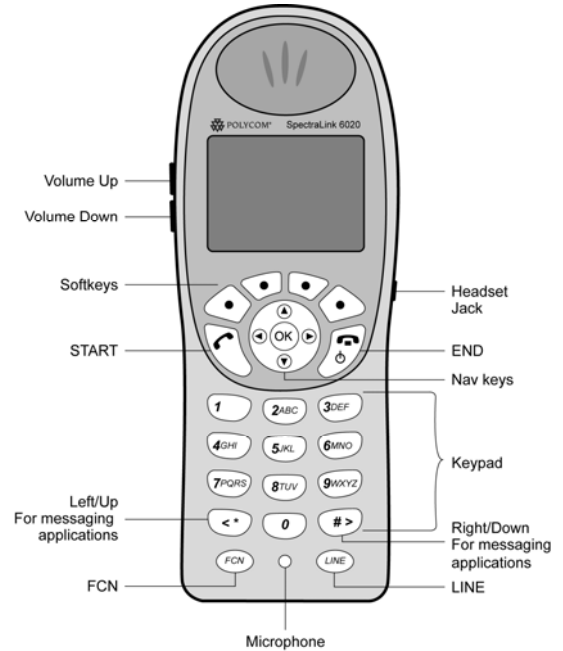

**SpectraLink 6020 Wireless Telephone**

- On/Off** Press and hold **END** Two chirps on, one chirp off
- Make a call** Press **START** to get dial tone.
- Hang up** Press **END**. Be sure to do this at the end of each call.
- Answer call** Press **START**. Line indicator comes on steady when the call is answered.
- Answer second call** Press **HOLD** to put your current call on hold, or **END** to hang up. Press **LINE** + the digit that is flashing.
- Hold** Press **HOLD**
- Take off Hold** Press **LINE** followed by the digit for the line on hold, which will be flashing.
- Mute On/Off** Press the **MUTE** softkey.
- Function** Pressing **FCN** while off hook allows you to scroll through menu screens.
- User Options** Press the **CFG** softkey while on hook to change handset settings.

For information on Battery Pack charging and setting user preferences, see the Wireless Telephone User Guide.

