

# Polycom® RealPresence Debut™ with BlueJeans Relay

1.0 | 3725-69562-001A | October 2017

Polycom® RealPresence Debut™ is a video collaboration system with an integrated camera and microphone. The system offers an intuitive user interface and rich collaboration features for your BlueJeans meetings.



## Power the System On


- » Press and hold  for 5 seconds.

## Power the System Off

- » Press and hold  for about 2 seconds; a **Shutdown RealPresence Debut** prompt displays.

## Join a BlueJeans Meeting from the Calendar


When you add the system as the location of a BlueJeans meeting, you can join the meeting from the Calendar.

- » From the Home screen, select .

The system connects directly to the scheduled BlueJeans meeting.


## Join a BlueJeans Meeting

You can use a favorite on the system to start an impromptu BlueJeans meeting using your meeting ID.


- 1 From the Home screen, select .
- 2 Navigate to **Contacts > Favorites**, and select the speed dial entry for joining a meeting.
- 3 Enter the meeting ID followed by #. For example, enter *357-517-0532#*.
- 4 (If needed) Enter the moderator or participant passcode.
- 5 Select #.

## Start a BlueJeans Meeting

You can use a favorite on the system to start a BlueJeans meeting using the meeting ID assigned to the meeting room.


- 1 From the Home screen, select .
- 2 Navigate to **Contacts** and select the speed dial entry for starting a meeting. (This entry should automatically include the meeting ID and, if needed, the moderator passcode.)

## Show or Hide Self-View

- » To show or hide your self-view on the monitor during a call, select .

## Change the Video Layout

You can change the layout of how video, self view, and content display during an active call.

- » To change the video layout during a call, select  and select a video layout.



## Pause Video

- » Select .

## Adjust the Volume

- » Press  or  on the remote control.



## Mute Your Microphone

- » Press  on the remote control or  on the table microphone.



## Start Content

- » Select **Start HDMI** .


## Stop Content

- » Do one of the following:
  - Select **Stop HDMI** .
  - To stop content out of a call, select **Stop HDMI** or press  on the remote control.

## Adjust the Local Camera

- » Do one of the following:
  - Press  or  on the remote control to zoom in and zoom out.
  - When the toolbar is hidden, press the left, right, up, and down navigation buttons on the remote control to adjust the position.


## End a Call

» To hang up a call, select .

## Add to the Contacts List

- 1 In the web interface, select **Contacts**.
- 2 Click **+ Add Contact**, and then add the name and number of the person in the input field.
- 3 Click **Save**.

## Remote Control

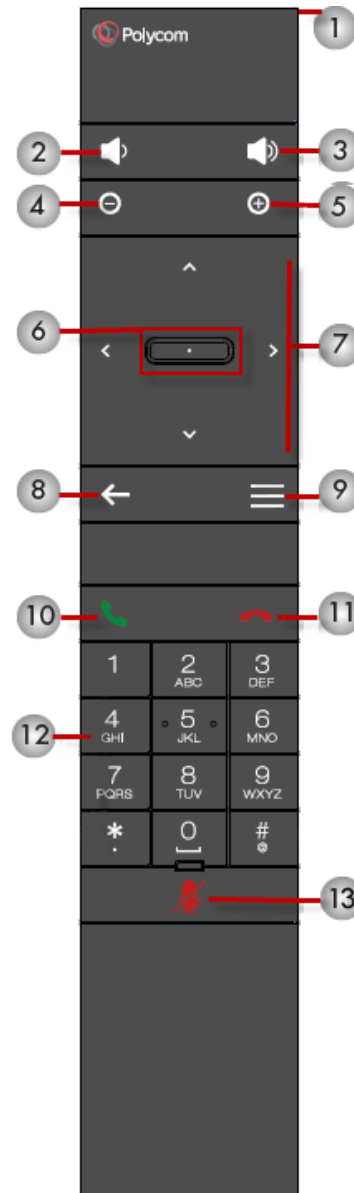

## Parts of the Remote Control

Number	Description
1	LED IR emitter
2	Decrease speaker volume
3	Increase speaker volume
4	Zoom camera out
5	Zoom camera in
6	Select button - Press center button to select highlighted menu item
7	Navigate through menu items using the up, down, left, and right buttons; pan/tilt the camera
8	Return to the previous screen or delete characters
9	Return to the Home screen or return to the Call screen in an active call
10	Place or answer a call
11	End or reject a call
12	Enter numbers
13	Mute and unmute a microphone