

Quick Tips for Polycom® RealPresence Debut™ with Zoom Connector for Polycom

3725-84751-001A | May 2017

Polycom® RealPresence Debut™ with Zoom Connector for Polycom is a video collaboration solution with an integrated camera and microphone. The system offers an intuitive user interface that includes rich collaboration features.



Power the System On


- » Press and hold  for 5 seconds.

Power the System Off

- » Press and hold  for 5 seconds.


Join a Scheduled Zoom Meeting

When you add the RealPresence Debut system as the location of a Zoom meeting, you can join the meeting directly from the system's Calendar.

- » From the Home screen, select **Calendar** .
The system connects directly to the scheduled Zoom meeting.


Start a Zoom Meeting

You can use a favorite on the system to start an impromptu Zoom meeting using your meeting ID.


- 1 From the Home screen, select .
- 2 Navigate to **Contacts > Favorites**, and select **Join Zoom Meeting**.
- 3 Do one of the following:
 - Enter the meeting ID. For example, #357-517-0532#.
 - Pair your device with the system using the URL and pairing code shown onscreen.

Start a Meet Now Meeting

You can use a favorite on the system to start a Meet Now Zoom meeting using the meeting ID assigned to the meeting room.


- 1 From the Home screen, select .
- 2 Navigate to **Contacts > Favorites**, and select **Meet Now**.

Show or Hide Self-View

- » To show or hide your self-view on the monitor during a call, select .

Change the Video Layout

You can change the layout of how video, self view, and content display during an active call.

- » To change the video layout during a call, select  and select a video layout.



Pause Video

- » Select .

Adjust the Volume

- » Press  or  on the remote control.



Mute Your Microphone

- » Press  on the remote control or  on the table microphone.



Start Content

- » Select **Start HDMI** .


Stop Content

- » Do one of the following:
 - Select **Stop HDMI** .
 - To stop content out of a call, select **Stop HDMI** or press  on the remote control.

Adjust the Local Camera

- » Do one of the following:
 - Press  or  on the remote control to zoom in and zoom out.
 - When the toolbar is hidden, press the left, right, up, and down navigation buttons on the remote control to adjust the position.


End a Call

» To hang up a call, select .

Add to the Contacts List

- 1 In the web interface, select **Contacts**.
- 2 Click **+ Add Contact**, and then add the name and number of the person in the input field.
- 3 Click **Save**.

Remote Control

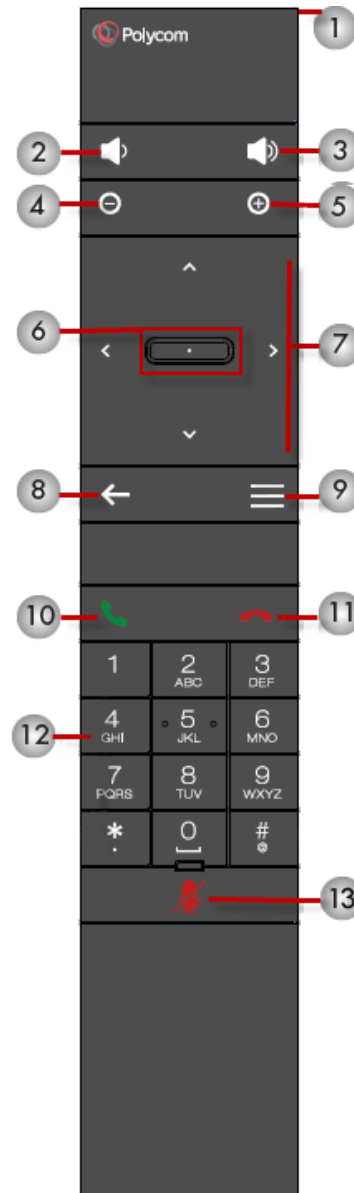

Parts of the Remote Control

Number	Description
1	LED IR emitter
2	Decrease speaker volume
3	Increase speaker volume
4	Zoom camera out
5	Zoom camera in
6	Select button - Press center button to select highlighted menu item
7	Navigate through menu items using the up, down, left, and right buttons; pan/tilt the camera
8	Return to the previous screen or delete characters
9	Return to the Home screen or return to the Call screen in an active call
10	Place or answer a call
11	End or reject a call
12	Enter numbers
13	Mute and unmute a microphone